



The PSK-3 Proximity Key Ring Tag from Farpointe Data is a member of the *Pyramid Series* Proximity line of OEM proximity readers, cards and tags, and may be used with all the Pyramid Series readers. Equipped with a brass eyelet, the tag is intended for attachment to either a key chain or necklace for convenient carrying.

The PSK-3 is manufactured of light gray ABS and is based upon proven passive radio frequency identification technology (RFID). Physical size is a nominal 1.5 x 1.2 x 0.15 inches (36x29x3.8 mm), making it one of the absolute smallest proximity key ring tags available. Washing machine tough, it is backed by a lifetime warranty. The PSK-3 may be sequentially coded in either a standard 26-Bit Wiegand, custom Wiegand or magnetic stripe data format, all with exact number sequences. As a cross-reference the PSK-3's internal ID number is permanently marked on its back.

The Pyramid Series line includes a comprehensive selection of proximity access cards and tags that may be used interchangeably with any of the Pyramid Series readers, or one another. Cards and tags in the line include the PSC-1 Standard Light Proximity Card, the PSI-4 Image Technology Proximity Card, the PSM-2 Multi-Technology Proximity Card, and the PSK-3 Proximity Key Ring Tag.

- Proximity RFID technology. » No direct physical contact required between tag and reader.
- Passive operation. » No batteries required.
- Reinforced brass eyelet. » Convenient on a key chain or necklace.
- Compact, robust, and durable. » Washing machine tough.
- Wiegand and magnetic stripe data formats. » Compatible with all standard access systems.
- Exact coding as ordered, with no under- or over-runs. » Provides for easy block enrollment into access system.
- Reverse molded logo. » Straightforward private labeling.
- [www.FarpointeData.com](http://www.FarpointeData.com). » For the latest on your INTELLIGENT proximity alternative™.



**PYRAMID SERIES**  
**PROXIMITY**


# PSK-3 Proximity Key Ring Tag

Data Sheet

Pyramid Series Proximity™

<b>Read Range <sup>a</sup>:</b> P-300 - Up to 2 inches (51 mm) P-400 - Up to 1 inch (25 mm) P-500 - Up to 3 inches (76 mm)		P-600 - Up to 1 inches (25 mm) P-700 - Up to 6 inches (152 mm)	
<b>Size:</b> Nominal 1.5 x 1.2 x 0.15 inches (36 x 29 x 3.8 mm)		<b>Weight:</b> 0.16 oz. (4.5 g)	
<b>Operation:</b> Passive (no battery)		<b>Frequency:</b> 125 KHz excitation	
<b>Humidity:</b> 0-95% non-condensing		<b>Operating Temperature:</b> -40° C to +65° C	
<b>Material:</b> ABS		<b>Color:</b> Light Gray	
<b>Eyelet:</b> Reinforced Brass		<b>Marking:</b> Date Code and ID	
<b>Formats:</b> Wiegand (26-bit Industry Standard and custom formats) and ABA Track II magnetic stripe (clock and data)			
<b>Warranty:</b> The PSK-3 carries a limited lifetime warranty against defects in materials and workmanship.			
<b>Certifications:</b> CSA, UL, FCC, CE, C-Tick.			

a. Read range is stated in a clean RF and electrical environment with the card presented parallel to the reader surface and the reader operating at 12 VDC. Additionally, read range may be affected by local installation conditions.

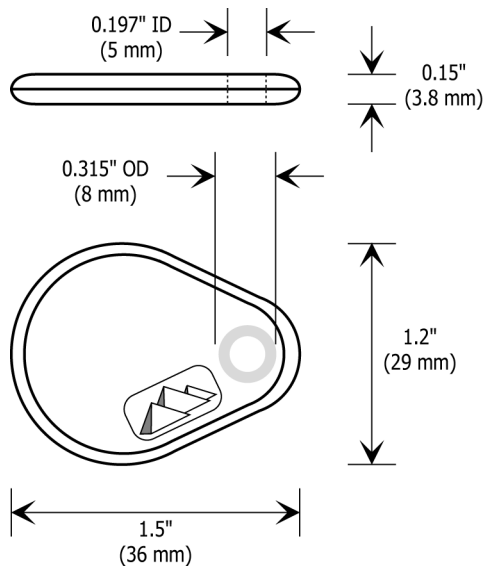

Farpointe Data reserves the right to change specifications without notice.

©2004 Farpointe Data, Inc. - All other trademarks are the property of their respective owners.

Protected by U.S. and Worldwide Patents.



Farpointe Data, Inc.  
e-mail: sales@pyramidseries.com  
web: www.pyramidseries.com

Presented By